

Uni-Vit

MMF LTD
Head Office & Contracts Division
Flue House, 55 Woodburn Road
Smethwick, West Midlands
B66 2PU
Tel: 0121 555 6555
Fax: 0121 555 1606
Fax: 0121 555 6816 (Contracts)
E-mail: mmf@fluepipes.com
Website: <http://www.fluepipes.com>

MMF (North Eastern)
Crowley Road, Swalwell, Gateshead,
Tyne and Wear NE16 3HF
Tel: 0191 488 1111
Fax: 0191 488 0088

MMF (Northern)
Flue House, Victoria Street,
Mansfield, Notts NG18 5SU
Tel: 01623 658040
Fax: 01623 660583

MMF (North Western)
Unit 3, Montford Enterprise Centre,
West Ashton Street, Salford,
Greater Manchester M50 2SN
Tel: 0161 737 8855
Fax: 0161 737 1777

MMF (Midlands)
Flue House, 55 Woodburn Road
Smethwick, West Midlands B66 2PU
Tel: 0121 555 6789
Fax: 0121 555 6727


MMF (South Western)
Flue House, Portway Trading Estate,
Portview Road, Bristol BS11 9LQ
Tel: 0117 982 8252
Fax: 0117 982 8225

MMF (South Eastern)
5 Manor Park, Manor Road, Erith,
Kent DA8 2AT
Tel: 01322 346444
Fax: 01322 348999

EFFICIENT DISTRIBUTION

AND DELIVERY

NATIONWIDE

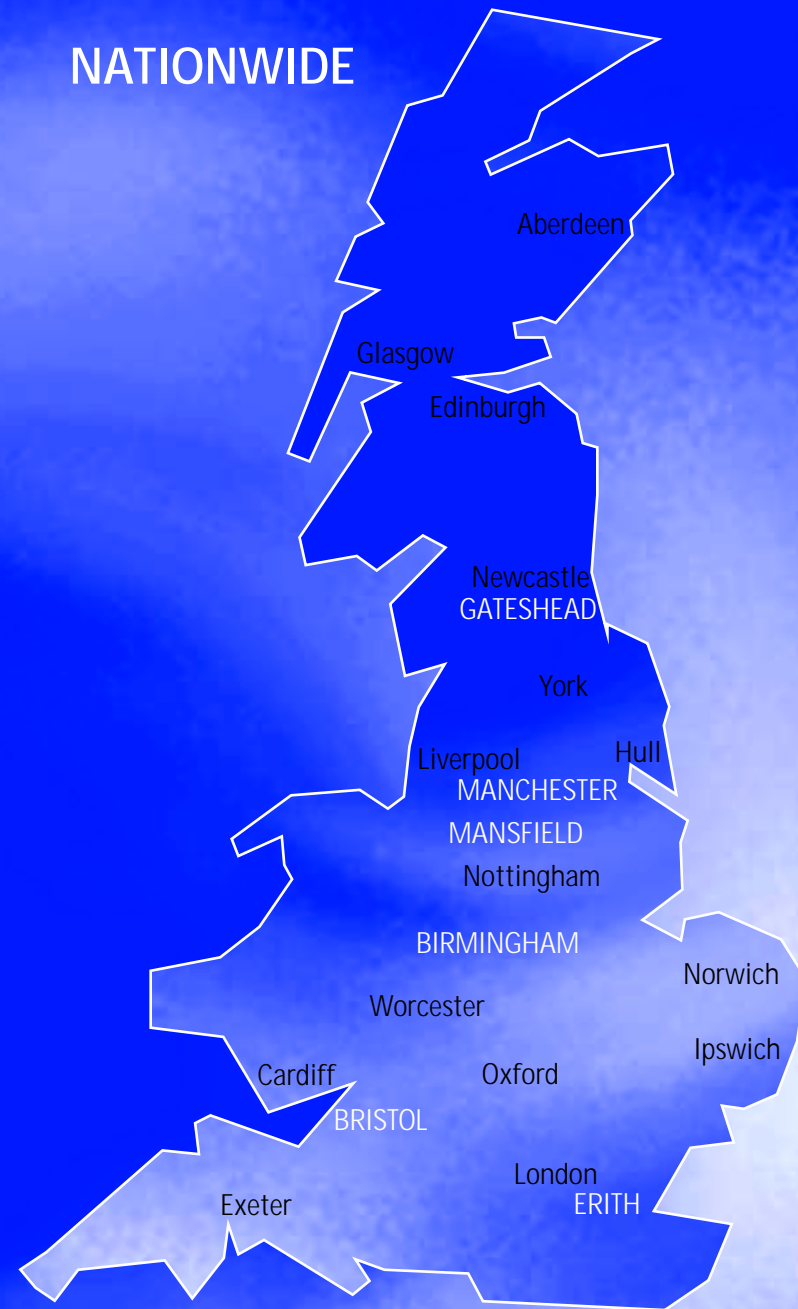


COMPETITIVE PRICES

VAST STOCKS

SPEEDY DELIVERIES

Uni-Vit

Vitreous Enamelled Stovepipe

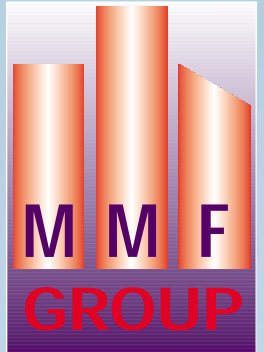

Uni-Vit

Vitreous Enamelled Stovepipe System

Uni-Vit Stovepipe is available in Gloss White, Gloss and Matt Black. The Matt Black has been specifically designed to ensure that it blends visually with the finish on multi-fuel stoves.

As an additional feature the brass clean-out doors enhance the image of a top quality product.

By employing the latest advances in modern technology and utilising specially designed machinery MMF are able to offer the very economic and highly efficient Uni-Vit flue system that is good to look at, simple to install and easy to maintain while remaining competitively priced.

- British made single skin system suitable for use with Oil, Gas and all solid fuels
- Manufactured from high quality steel finished with two coats of Class A quality enamel - internally and externally
- Compatible with most other systems
- Available in nominal bore diameters of 100mm, 125mm, 150mm
- Fully Guaranteed

Uni-Vit conforms to BS6999 1989 – Installation of Flues and Chimneys for Class 1 Appliances.

Minimum Quality Class A Enamel when tested to BS1344 Part 3 and conforming to to BS1344 parts 1 and 7 for temperature and thermal shock.

Joining

The Uni-Vit System is designed to be installed with the socket (the female coupling) directed upwards. The spigot (the male end) must always point downwards and must be properly sealed with fire cement.

We reserve the right to change product specification without prior notice


STANDARD PIPE



Diameter (internal)	Nominal Diameter of Socket (internal)
100mm (4")	105mm
125mm (5")	130mm
150mm (6")	155mm


Available in 300mm, 600mm and 1000mm lengths from stock
1200mm (4ft) lengths available to special order

ADJUSTABLE WALL BRACKET



Provides lateral stability and is adjustable from 2" to 10"

CUT LENGTH ADAPTER



	A
100mm (4")	076
125mm (5")	076
150mm (6")	076

Joins two cut pieces together

ELBOWS


Designed to angle the flue pipe run where necessary.

Available in the sizes illustrated.


All sizes are available with or without a cleaning access door.

ELBOW DIMENSION GUIDE

All measurements relate to dimensions on centre line of components.

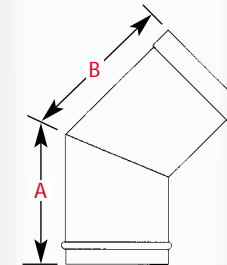

90° TEE (including cap)



100mm, 125mm and 150mm diameter
All with 75mm branch

For horizontal connection to an appliance with cleaning access, if required via the base opening. The base is closed with Tee Cap.
Available with or without Draught Stabilizer - see price list.


INCREASER



A	B
125mm	100mm
150mm	125mm
175mm	150mm


May be used for boiler connection to flue etc.

30° ELBOW




	A	B
100mm (4")	126mm	87mm
125mm (5")	143mm	94mm
150mm (6")	150mm	107mm

90° ELBOW



	A	B
100mm (4")	201mm	162mm
125mm (5")	236mm	188mm
150mm (6")	261mm	212mm


ROSETTE



Nominal Pipe Dia/Int	A	B
100mm (4")	200mm	110mm
125mm (5")	200mm	136mm
150mm (6")	225mm	162mm


To tidy hole in ceiling or wall

45° ELBOW




	A	B
100mm (4")	141mm	102mm
125mm (5")	162mm	113mm
150mm (6")	172mm	123mm

110° ELBOW



	A	B
100mm (4")	201mm	162mm
125mm (5")	236mm	188mm
150mm (6")	261mm	212mm

ADAPTOR TO FLEX (Stainless Steel)



PIPE SIZE	A
100mm	100mm
125mm	125mm
150mm	150mm

To connect Uni-Vit to Flexible Liner